

Supplementary  
Owner's Manual  
for BMW  
Z4 M Roadster



The Ultimate  
Driving Machine



امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۰۰۰۰۰۰

www.ardad.com

# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

**FarmaSOS.com**

## Z4 M Roadster **Supplementary Owner's Manual for Vehicle**

Congratulations, and thank you for choosing a BMW Z4 M Roadster.

Thorough familiarity with your BMW Z4 M Roadster will provide you with enhanced control and security when you drive it. Therefore, we have one request:

Before starting off in your new BMW Z4 M Roadster, please take the time to read this Supplementary Owner's Manual and familiarize yourself with the information that we have compiled for you. The manual contains important data and instructions intended to assist you in obtaining maximum satisfaction from your BMW Z4 M Roadster's unique array of advanced technical features.

We wish you an enjoyable driving experience.

BMW AG

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

# امداد خودرو فارما

تلفن شبانه روزی: ۰۸۵-۸۸۸۶۲-۰۲۱

[FarmaSOS.com](http://FarmaSOS.com)

© 2006 Bayerische Motoren Werke  
Aktiengesellschaft  
Munich, Germany  
Reprinting, including excerpts, only with the  
written consent of BMW AG, Munich.  
Order No. 01 41 0 011 779  
US English XII/05  
Printed in Germany  
Printed on environmentally friendly paper,  
bleached without chlorine, suitable for recycling.

# Contents

The fastest way to find information on special topics is by using the index starting on page 40.

## Using this Owner's Manual

4 Notes

## At a glance

8 Cockpit

## Controls

16 Everything under control

18 Technology for driving comfort and safety

## Driving tips

22 Special operating instructions

## Mobility

26 Refueling

27 Wheels and tires

28 Under the hood

31 Replacing components

## Reference

36 Technical data

40 Everything from A to Z

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

# Notes


## About this Owner's Manual


This Supplementary Owner's Manual contains all the important equipment, instructions and technical data that distinguish the BMW Z4 M Roadster from the BMW Z4. For descriptions of equipment not included in this Supplementary Owner's Manual, please refer to the Owner's Manual for the BMW Z4 or additional brochures in the vehicle's literature.


We have made every effort to ensure that you will find what you need in this Supplementary Owner's Manual as quickly as possible. The fastest way to find specific topics is to refer to the detailed index at the back of the manual. If you wish to gain an initial overview of your vehicle, you will find this in the first chapter.

Should you sell your BMW Z4 M Roadster some day, please remember to hand over the Supplementary Owner's Manual as well; it is an important component of your vehicle.

## Symbols used

 Indicates precautions that must be followed precisely in order to avoid the possibility of personal injury and serious damage to the vehicle.


 Indicates information that will assist you in gaining the optimum benefit from your vehicle and enable you to care more effectively for your vehicle.

 Refers to measures that can be taken to help protect the environment.

◀ Marks the end of a specific item of information.

\* Indicates special equipment, country-specific equipment and optional extras, as well as equipment and functions not yet available at the time of printing.

### Symbol on vehicle parts

 Indicates that you should consult the relevant section of this Owner's Manual for information on a particular part or assembly.

FarmaSOS.com

## Your individual vehicle

When you ordered your BMW, you chose various items of equipment. This Owner's Manual describes all models and equipment that BMW offers within the same group.

We hope you will understand that equipment and features are included which you might not have chosen for your vehicle. Any differences can easily be identified since all optional accessories and special equipment are marked with an asterisk \*.

If equipment in your BMW Z4 M Roadster is not described in this Supplementary Owner's Manual, please refer to the Owner's Manual for the BMW Z4.

## Status at time of printing

BMW pursues a policy of continuous, ongoing development that is conceived to ensure that our vehicles continue to embody the highest quality and safety standards combined with advanced, state-of-the-art technology. For this reason, it is possible that features described in this Supplementary Owner's Manual could differ from those on your vehicle.

FarmaSOS.com



# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)



## At a glance

This overview of buttons, switches and displays is intended to familiarize you with your vehicle's operating environment. The section will also assist you in becoming acquainted with the control concepts and options available for operating the various systems.


امداد خودرو فارما


تلفن شبانه روزی: ۰۸۵-۸۸۸۶۲۰۲۱


FarmaSOS.com

# Cockpit

## Around the steering wheel: controls and displays

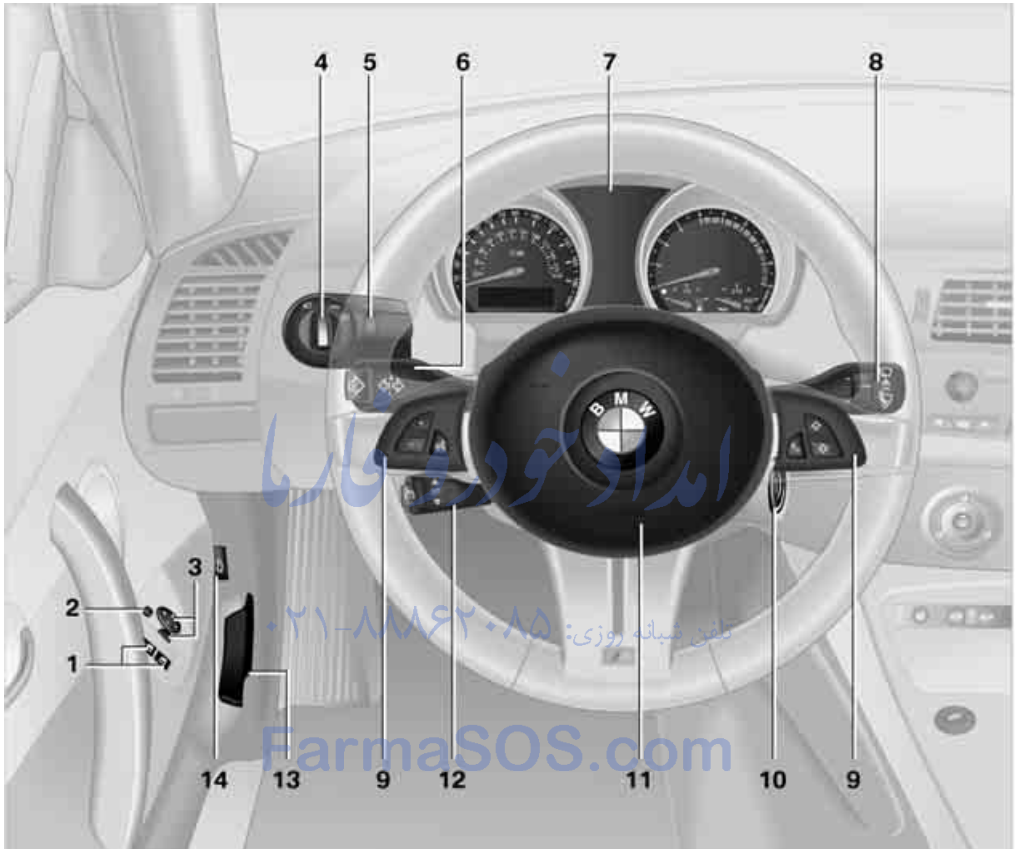


 For descriptions of equipment listed here without a page reference, please refer to the Owner's Manual for the BMW Z4 under the respective term. ◀


1  Opening and closing windows


2 Folding exterior mirrors in or out\*




3 Adjusting exterior mirrors

4  Parking lamps


 Low beams

 Automatic headlamp control\*

5  Instrument lighting

- 6  Turn signal indicators
-  High beams, headlamp flasher
-  Roadside parking lamps\*
- BC Computer

7 Instrument cluster 10

- 8  Windshield wipers  
Rain sensor\*

9 Buttons on the steering wheel

 Volume





- ▶ Press: to accept and end a telephone call; to start dialing for selected telephone numbers

- ▶ Press longer: activate and deactivate voice entry\*



Fast forward/rewind

- ▶ Radio

Press: next station stored  
Press longer: station search

- ▶ CD

Press: jump to next track  
Press longer: fast forward/  
rewind

- ▶ Telephone

Scan register of names

R/T

Display/hide telephone book. Display the entries one after another with the forward/backward buttons

11 Horn: the entire surface

12  Cruise control\*

13 Releasing the hood

14 Opening the luggage compartment lid

10 Ignition lock

## Instrument cluster



WAGO/S&amp;P/14/16

▶ For descriptions of equipment listed here without a page reference, please refer to the Owner's Manual for the BMW Z4 under the respective term. ◀

1 Speedometer

2 Indicator lamps for turn signals

3 Indicator and warning lamps 11

4 Tachometer 16

with indicator and warning lamps 11

5 Engine oil thermometer 16

6 Fuel gauge 16

7 Button for

▶ Displaying the clock

▶ Service interval display

8 Button for

▶ Resetting trip odometer

▶ Setting the clock

9 Display for

▶ Trip odometer/Odometer

▶ Clock

▶ Service interval













▶ Computer











# Indicator and warning lamps

## Technology that monitors itself

Indicator and warning lamps that are identified by ● are tested for proper functioning whenever the ignition key is turned. They each light up once for different periods of time.

If a malfunction occurs in one of the monitored systems, the corresponding lamp does not go out after the engine has started, or it lights up again while the vehicle is in motion. More information can be found on the specified pages or in the Owner's Manual for the BMW Z4 under the respective terms.

-  Turn signal indicators
-  Battery charge current ●
-  Headlamp flasher/High beams
-  Engine oil pressure/  
Engine oil level ● 28
-  Antilock Brake System ABS/Driving stability control systems ●
-  Antilock Brake System ABS/Driving stability control systems for Canadian models
-  Brake system ●
-  Brake warning lamp for Canadian models
-  Brake pads ●
-  Parking lamps/Low beams
-  Flat Tire Monitor ● 18
-  Airbags ●

-  Safety belt reminder
-  Defective bulb
-  Doors or luggage compartment lid open
-  Engine electronics ●  
Malfunction in the engine electronics. You can continue to drive with reduced engine output. Please have the system inspected by your BMW Center.
-  Service engine soon ●
-  Service engine soon indicator lamp for Canadian models
-  Dynamic Stability Control DSC ● 18
-  Add coolant
-  Coolant temperature 16
-  Check gas cap ●


## Colors

The indicator and warning lamps can light up in various colors and combinations.

- ▷ Red:  
Stop the vehicle immediately or an important reminder
- ▷ Red and yellow:  
Continue driving cautiously
- ▷ Yellow:  
Have the system checked soon or for your information
- ▷ Green or blue:  
For your information

# Around the center console: controls and displays



 For descriptions of equipment listed here without a page reference, please refer to the Owner's Manual for the BMW Z4 under the respective term. ◀

- 1 Reading lamps\*
- 2 Interior lamps
- 3 Automatic climate control



Air distribution

AUTO

Automatic air distribution and flow rate



Cooling function



Automatic recirculated-air control  
AUC



Recirculated-air mode



Maximum cooling



Air flow rate



Defrosting windows



Rear window defroster

- 4  Seat heating\* [FarmaSOS.com](http://FarmaSOS.com)



Opening the convertible top



Closing the convertible top

**DSC**

DSC Dynamic Stability Control 18



Flat Tire Monitor FTM

- 5 Indicator/warning lamp for passenger air-bags
- 6 Central locking system
- 7 Hazard warning flashers
- 8 Sport switch





# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)



## Controls

This chapter is intended to provide you with information for complete control of your vehicle. All features and accessories that are useful for driving and for your safety, comfort and convenience, are described here.

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

# Everything under control

## Tachometer



The orange warning zone, located between arrows **1** and **2**, shows the currently permissible engine speed, which depends on engine temperature. As engine temperature increases, some of the LEDs in this warning zone go out one after another.

Avoid driving at engine speeds within the illuminated warning zone whenever possible.

Never force the engine speed up into the red warning zone beginning at arrow **2**. To protect the engine, the fuel supply is interrupted when speed reaches this sector.

## Fuel gauge

### Reserve

In contrast to the descriptions in the Owner's Manual for the BMW Z4, the reserve level for the BMW Z4 M Roadster is approx. 2.6 US gallons/10 liters.

## Coolant temperature

In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster is not equipped with a coolant temperature gauge.

Should the coolant and thus the engine become too hot, a warning lamp will come on in the instrument cluster.

## Red warning lamp



The engine is overheated. Reduce your speed immediately and pull over at a suitable location. Switch off the engine and allow it to cool down. Contact your nearest BMW Center or a workshop that works according to BMW repair procedures with correspondingly trained personnel.



Do not open the hood, otherwise there is a risk of injury from scalding. ◀

## Yellow warning lamp



The engine is too warm. Continue driving, but in a moderate manner, so that the engine can cool down.

If the warning lamp comes on again, have the engine checked without delay.

## Engine oil thermometer



The general operating temperature lies between 175 °F /80 °C and 250 °F /120 °C. Do not exceed the maximum temperature of 300 °F /150 °C.

If the engine oil temperature is too high, the permissible engine speed, and thus the available engine output, is reduced.

## Service interval display



Regardless of your service requirements, have the breaking-in inspection per-

formed by your BMW Center after driving  
1,200 miles/2,000 km. ◀

# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)


# Technology for driving comfort and safety

## Driving stability control systems

In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster does not feature Dynamic Traction Control DTC.

### Dynamic Stability Control DSC

DSC prevents slip at the drive wheels while starting off and accelerating the vehicle. DSC also recognizes unstable vehicle conditions, such as fishtailing or nose-diving. In these cases, and subject to physical limits, DSC helps to keep the vehicle on a steady course by reducing engine speed and by applying brakes at individual wheels.

 The laws of physics cannot be repealed even with DSC. It will always be the driver's responsibility to drive in a manner that matches road conditions. Therefore, do not limit the additional safety margin by practicing risky driving. ◀

### Deactivating DSC



Press the button; the DSC indicator lamp in the instrument cluster lights up. No more interventions to increase stability and forward momentum are carried out.

To enhance vehicle stability, reactivate DSC as soon as possible.

### Activating DSC

Press the button briefly; the indicator lamp goes out in the instrument cluster.

### Checking



The indicator lamp flashes: DSC controls the drive forces and brake forces.

The indicator lamp is lit: DSC is deactivated.

## Flat Tire Monitor FTM

In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster is not equipped with Run Flat tires. You should therefore observe the following when you receive a flat tire warning.

### Flat tire warning



The warning lamp in the instrument cluster lights up in red. A signal also sounds. There is a flat tire or substantial loss of tire pressure.

1. Reduce speed and pull the vehicle over carefully. Avoid strong braking and steering maneuvers.
2. Determine which tire is damaged. To do this, check the tire inflation pressure using the M Mobility System, refer to Restoring tire inflation pressure on page 32.
3. Use the M Mobility System to repair the flat tire, refer to page 31.

## Power steering

In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster is equipped with hydraulic power steering.

# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

**FarmaSOS.com**



# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

## Driving tips

This section provides you with information useful in dealing with specific driving and operating conditions.

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

# Special operating instructions

## Break-in procedures

In contrast to the descriptions in the Owner's Manual for the BMW Z4, please take note of the following differences for your BMW Z4 M Roadster.

Always obey all official speed limits.

## Engine and differential

### Up to 1,200 miles/2,000 km

Drive at varying engine and road speeds, but do not exceed 5,500 rpm or 100 mph/170 km/h.

Strictly avoid depressing the accelerator pedal to full-throttle position.

After the breaking-in inspection at 1,200 miles/2,000 km, engine or road speeds can be gradually increased.

## Transmission

The function of the transmission reaches its optimal level only after driving a distance of approx. 300 miles/500 km. Do not exceed engine speeds of 5,500 rpm during this time.

## After replacing components

The same break-in procedures should be observed if any of the components mentioned above have to be renewed in the course of the vehicle's operating life.

## Driving notes

### Ground clearance



The front spoiler greatly restricts the vehicle's ground clearance. Make sure that your BMW always has sufficient ground clearance, e.g. when entering underground garage complexes or driving over the edge of a curb; otherwise the front spoiler could be damaged. ◀

### Braking safely

In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster is equipped with perforated brake discs.

In certain braking situations, operation of the perforated brake discs can cause noise; however, this does not affect the performance and operating safety of the brakes.



# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

**FarmaSOS.com**



# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

# امداد خودرو فارما

## Mobility

This section helps you maintain your car's mobility by supplying important information on vital topics including fuels and lubricants, wheels and tires, service, maintenance and breakdown assistance.

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)


# Refueling

## Note when refueling

In contrast to the descriptions in the Owner's Manual for the BMW Z4, please take note of the following differences for your BMW Z4 M Roadster.

### Fuel tank capacity

Approx. 14.5 US gallons/55 liters, including the reserve capacity of approx. 2.6 US gallons/10 liters.

 Do not drive until the tank is empty. Otherwise, the engine may not operate properly and damage could result. ◀

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

# Wheels and tires

## Correct wheels and tires


In contrast to the descriptions in the Owner's Manual for the BMW Z4, your BMW Z4 M Roadster is not equipped with Run Flat tires.

## Information for your safety

The factory-approved radial-ply tires are specifically matched to your vehicle and offer optimal road safety as well as enhanced driving comfort if used properly.

In the event of a flat tire, proceed as described under M Mobility System, refer to page 31.

## Tire inflation pressures


Tire size	Pressure specifications in psi/kPa	
All pressure specifications in the table are indicated in psi/kilopascal with cold tires, cold = ambient temperature		
Front: 225/45 ZR 18	32/220	–
Rear: 255/40 ZR 18	–	32/220
225/40 R 18 92 V M+S	33/230	36/250

You will find more information about permissible loads and weights on page 38.

## Snow chains\*

تلفن شبانه روزی: ۰۲۱-۸۸۶۲۰۸۵


Snow chains may be attached only to winter tires of the size 225/40R 18 on both rear wheels.

 Do not initialize the Flat Tire Monitor if snow chains are mounted, otherwise the instrument might issue an incorrect reading. When driving with snow chains, you may find it helpful to deactivate DSC temporarily, refer to page 18. ◀

FarmaSOS.com

# Under the hood

## Important parts in the engine compartment

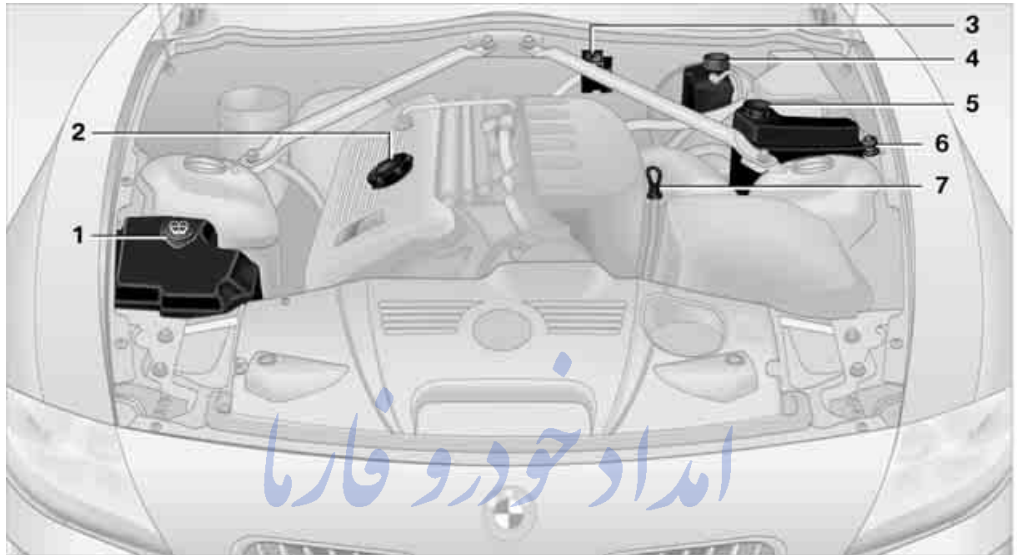

- |   |   |
|---|---|
| <p>1 Washer fluid reservoir for headlamp and windshield washer system</p> <p>2 Filler neck for engine oil, refer to Adding engine oil</p> <p>3 Jump-starting connection</p> | <p>4 Reservoir for brake fluid</p> <p>5 Coolant expansion tank</p> <p>6 Chassis ground, negative terminal</p> <p>7 Dipstick for engine oil, refer to Checking the oil level</p> |
|---|---|




FarmaSOS.com

## Engine oil


Like fuel consumption, engine oil consumption depends on your driving style and the vehicle's operating conditions.

### Warning lamp


#### Engine oil pressure

-  The warning lamp lights up in red:
-  The engine oil pressure is too low.
-  Stop the vehicle immediately and switch off the engine. Check the engine oil level and top up if necessary. If the oil level is correct, please contact your nearest BMW Center or a workshop that works according to BMW repair

procedures with correspondingly trained personnel.

 Do not continue driving, otherwise the engine could sustain serious damage from inadequate lubrication. ◀

#### Engine oil level

-  The warning lamp lights up in yellow while you are driving. A signal also sounds.

The oil level is at the absolute minimum; check engine oil level using dipstick 7 and refill as soon as possible. Do not drive more than 30 miles/50 km before refilling.



The warning lamp lights up in yellow after the engine is switched off. A signal also sounds.

Check the engine oil level using dipstick 7 at the earliest opportunity, e.g. when you stop to refuel, and refill engine oil.



The warning lamp lights up in yellow within 30 seconds after the engine is started:

The oil level sensor is defective. Have the system checked as soon as possible.

## Checking the oil level

1. Position the vehicle on a level surface.
2. Switch off the engine when it is at operating temperature.
3. After approx. 1 minute, pull dipstick 7 out and wipe it off with a clean, lint-free cloth, paper towel or something similar.
4. Carefully push the dipstick fully into its tube, then pull it out again.  
The oil level must be between the two marks on the dipstick.



The oil volume between the two marks on the dipstick corresponds to approx. 1.4 US quarts/ 1.3 liters.

## Adding engine oil



Do not add oil until the oil level has dropped almost to the lower mark on the dipstick, refer to Checking the oil level.



Do not add oil beyond the upper mark on the dipstick, otherwise excessive oil can lead to engine damage. ◀

Before you check the engine oil level after adding oil, restart the engine and let it run to obtain a correct reading. Then proceed as described under Checking the oil level.



BMW engines are designed to operate without oil additives; the use of additives could even lead to damage in some cases. The same applies to the transmission and differential as well as to the power steering. ◀



Continuous exposure to used oil has caused cancer in laboratory tests. For this reason, thoroughly wash any areas of skin that have come into contact with oil using soap and water.

Keep oils, greases, etc. out of the reach of children and comply with the warnings on the containers. Otherwise, health hazards may result. ◀




Comply with the applicable environmental regulations concerning the disposal of used oil. ◀

Recommendation: have the oil changed at your BMW Center.


## Approved engine oils

The quality of the engine oil is extremely important for the function and life of an engine. BMW only approves specific oils after confirming their suitability for use in its vehicles with extensive testing.

Only use oils specifically approved for your vehicle model.

 Your BMW Center will be glad to advise you about oils currently approved for your vehicle. ◀

You can also call BMW of North America toll-free at 1-800-831-1117 or visit this website: [www.bmwusa.com](http://www.bmwusa.com) to obtain this information.

 Do not use any oil additives, as they could cause engine damage under some circumstances. ◀

### Alternative oil grades

If a high-performance synthetic oil approved by BMW should be unavailable, you may use small volumes of other oils for topping up between oil changes. The following data must appear on the packaging:

- ▷ Viscosity  
preferred: SAE 10W-60  
alternative: SAE 5W-40 or SAE 10W-40
- ▷ Specification  
preferred: API SJ/CF  
alternative: API SJ, also SK, SL, S...


### Low ambient temperatures

The oils used by BMW at the factory for your vehicle model can be used at virtually all ambient temperatures. However, if the vehicle is operated for a longer period at temperatures below  $-4^{\circ}\text{F}$  /  $-20^{\circ}\text{C}$ , your BMW Center will be glad to recommend a suitable oil.



# Replacing components

## Onboard tool kit

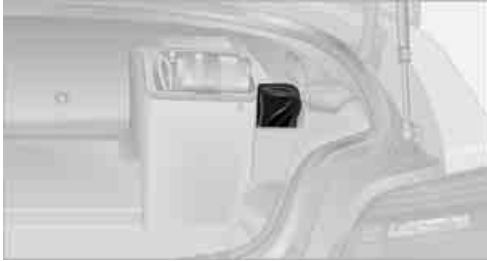

The onboard tool kit is stored in a tool pouch. It can be found on the right-hand side of the luggage compartment in a compartment next to the battery cover.

## M Mobility System

### Repairing a flat tire

To repair a flat tire, an M Mobility System is provided in your BMW Z4 M Roadster. Using this system you can apply a sealant to the inside of the tire, seal off the damaged area, restore the tire inflation pressure and then continue driving.

**⚠** Safety measures in the event of a flat: Park the vehicle as far as possible from passing traffic and on solid ground. Switch on the hazard warning flashers.

Lock the steering wheel so that the wheels are facing straight ahead. Apply the handbrake and engage first or reverse gear. Have all vehicle occupants get out of the vehicle and ensure that they remain outside the immediate area in a safe place, such as behind a guardrail.

If a warning triangle or portable hazard warning lamp is required, set it up on the roadside at an appropriate distance from the rear of the vehicle. Comply with all national safety guidelines and regulations. ◀

## Preparation



The M Mobility System is located on the right-hand side of the luggage compartment on the battery cover.

If possible, do not remove foreign bodies which have penetrated the tire.

▶ Corresponding information on using the M Mobility System is also provided on the device. ◀

**⚠** Before using the M Mobility System, note the information on the sealant bottle. ◀

Pull the sticker for the speed limit off the sealant bottle and affix it to the steering wheel.

▶ Please observe the expiry date on the sealant bottle. ◀

### The M Mobility System consists of



- 1 Sealant bottle and sticker with speed limit
- 2 Filler hose from sealant bottle to wheel



- 3 Cable and connector to cigarette lighter socket
- 4 Mounting for sealant bottle
- 5 Compressor
- 6 On/off switch
- 7 Gauge for indicating tire inflation pressure
- 8 Button for reducing tire inflation pressure
- 9 Connecting hose for connecting compressor and sealant bottle or compressor and wheel

Connector, cable and connecting hose are attached to the bottom of the compressor.

## Using the M Mobility System

To repair a flat tire with the M Mobility System, proceed as follows:

- ▷ Filling sealant into wheel
- ▷ Distribute sealant
- ▷ Restore tire inflation pressure

## Filling sealant into wheel

**⚠** Strictly adhere to the specified order, otherwise highly pressurized sealant could escape. ◀

1. Shake sealant bottle.
2. Screw hose **9** onto connection of sealant bottle.
3. Unscrew and remove dust cap from valve of defective wheel and screw filler hose **2** of sealant bottle onto valve.
4. Insert sealant bottle on compressor housing so that the bottle is in an upright position.

5. Make sure that the device is switched off, position 0.
6. Insert connector **3** into cigarette lighter socket inside the vehicle.
7. With the ignition switched on: Switch on the device and allow it to run for approx. 3 minutes to fill the wheel with sealant. It is not important what inflation pressure the tire has after this.
8. Switch off device.
9. Remove connecting hoses from connection of sealant bottle and tire valve. Stow the M Mobility System in the vehicle again.


## Distributing sealant

Immediately drive approx. 2 miles/3 km so that the sealant is evenly distributed in the tire.


- ▷ Do not exceed a speed of 35 mph or 60 km/h. Do not drive slower than 12 mph or 20 km/h if possible. ◀


## Restoring tire inflation pressure

1. After approx. 2 miles/3 km, pull over at a suitable location.
2. Screw compressor hose **9** directly onto tire valve.
3. Insert connector **3** into cigarette lighter socket inside the vehicle.
4. Correct tire inflation pressure to 29 psi/ 200 kPa. With the ignition switched on:
  - ▷ To increase inflation pressure: switch on the compressor, position I. To check the current inflation pressure, switch off the device briefly.


 Do not allow the compressor to run for more than 10 minutes, otherwise the device will overheat and may be damaged. ◀


▷ To reduce inflation pressure: press button **8**.

 If the inflation pressure is not maintained, drive the vehicle again, refer to Distributing sealant. Then repeat steps 1 to 4 once. Using the M Mobility System can be ineffective with tire punctures larger than approx. 1/6 in/ 4 mm. Please contact the nearest BMW Center or a workshop that works according to BMW repair procedures with correspondingly trained personnel if the tire cannot be made ready for driving with the M Mobility System. ◀

 The tire inflation pressure must be at least 29 psi/200 kPa. Otherwise do not continue driving. ◀

### Continued driving

 Do not exceed the permissible maximum speed of 50 mph or 80 km/h, otherwise accidents could result. ◀

 Reinitialize the Flat Tire Monitor. For instructions, refer to the Owner's Manual for the BMW Z4.

Have the defective tire and the sealant bottle of the M Mobility System replaced as soon as possible. ◀

FarmaSOS.com



# امداد خودرو فارما

تلفن شبانه روی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

## Reference

This chapter will help you find the desired information as quickly as possible. It contains the Technical data section as well as the manual's index.

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

# Technical data

## Engine data


		Z4 M Roadster
Displacement	cu in/cm <sup>3</sup>	198.1/3,246
Number of cylinders		6
Maximum power output	hp	330
at engine speed	rpm	7,900
Maximum torque	ft lbs/Nm	262/355
at engine speed	rpm	4,900

امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

## Dimensions

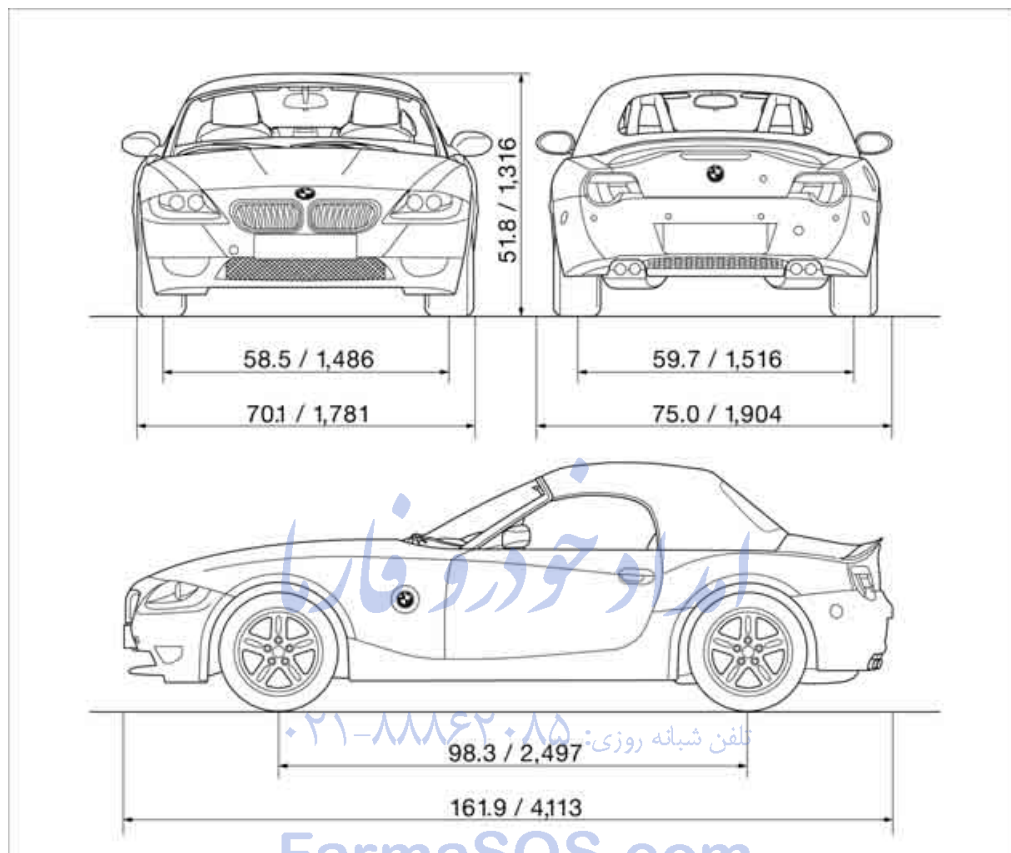

All measurements in inches/millimeters. Smallest turning circle dia. 34 ft 5 in/10.5 m.

## Weights

		Z4 M Roadster
Curb weight	lbs/kg	3,203/1,453
Approved gross vehicle weight	lbs/kg	3,821/1,733
Load	lbs/kg	617/280
Approved front axle load	lbs/kg	1,852/840
Approved rear axle load	lbs/kg	2,006/910
Luggage compartment capacity	cu ft/liters	7.1/200
With convertible top compartment folded up	cu ft/liters	7.8/220

Never exceed either the approved axle loads or the approved gross vehicle weight.

## Capacities

		Notes
Fuel tank	US gal/liters approx. 14.5/55	
including reserve of	US gal/liters approx. 2.6/10	
Window washer system		
including headlamp washers	US qts/liters approx. 5.3/5	
Engine with oil filter renewal	US qts/liters 5.8/5.5	For details: page 29
Manual transmission	US qts/liters 1.9/1.8	Oil change at breaking-in inspection and during every Inspection II
Differential	US qts/liters 1.2/1.1	Oil change at breaking-in inspection and during every Inspection II



# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

# Everything from A to Z

## Index

### A

- ABS Antilock Brake System
  - indicator lamp [11](#)
- Accessories, refer to
  - Your individual vehicle [5](#)
- Airbags
  - indicator lamp [11](#)
  - warning lamp [11](#)
- Antilock Brake System ABS
  - indicator lamp [11](#)
- Approved axle load, refer to
  - Weights [38](#)
- Approved engine oils [29](#)
- Approved gross vehicle weight, refer to
  - Weights [38](#)
- Assistance systems, refer to
  - Dynamic Stability Control DSC [18](#)
- Axle loads, refer to
  - Weights [38](#)

### B

- Battery
  - indicator lamp [11](#)
- Brake fluid
  - indicator/warning lamp [11](#)
- Brake hydraulic system
  - indicator/warning lamp [11](#)
- Brake lamps
  - indicator lamp, defective bulb [11](#)
- Brake pad wear indicator
  - warning lamp [11](#)
- Brakes
  - indicator/warning lamps [11](#)
  - operating noise [22](#)
- Brake system
  - indicator/warning lamps [11](#)
  - indicator lamp [11](#)
- Breakdown
  - Flat Tire Monitor [18](#)
- Breaking-in inspection [16](#)

Breaking in the differential,

refer to Engine and differential [22](#)

Breaking in the transmission,

refer to Transmission [22](#)

Break-in procedures [22](#)

Buttons on the steering wheel [9](#)

### C

Capacity

– luggage compartment, refer to Weights [38](#)

Center console, refer to

Around the center console [12](#)

Charge indicator lamp [11](#)

Check gas cap, indicator lamp [11](#)

Cockpit [8](#)

Comfort area, refer to Around the center console [12](#)

Compound brake discs, refer to Braking safely [22](#)

Consumption display, refer to Fuel gauge [16](#)

Controls and displays [8](#)

Coolant

– indicator lamp [11](#)

Coolant temperature [16](#)

Coolant thermometer, refer to Coolant temperature [16](#)

Cooling system, refer to Capacities [38](#)

Curb weight, refer to Weights [38](#)

Customized equipment, refer to Your individual vehicle [5](#)

Cylinders, refer to Engine data [36](#)

### D

Dashboard, refer to Cockpit [8](#)

Data [36](#)

– dimensions [37](#)

– engine data [36](#)

– technical [36](#)

Data, technical

– capacities [38](#)

– engine data [36](#)

– weights [38](#)

DBC Dynamic Brake Control

– warning lamp [11](#)

Dimensions [37](#)

Dipstick, engine oil [29](#)

Displacement, refer to Engine data [36](#)

Display elements, refer to Instrument cluster [10](#)

Displays, refer to Instrument cluster [10](#)

Displays and controls [8](#)

Driving notes [22](#)

Driving stability control systems [18](#)

DSC Dynamic Stability Control [18](#)

– indicator lamp [11](#), [18](#)

Dynamic Brake Control DBC

– indicator lamp [11](#)

Dynamic Stability Control DSC [18](#)

– indicator lamp [11](#), [18](#)

### E

Engine

– breaking in [22](#)

– data [36](#)

– electronics [11](#)

– indicator lamp [11](#)

– speed [16](#)

Engine compartment [28](#)

Engine data **36**  
Engine oil **28**  
– adding **29**  
– additives **29**  
– alternative oil grades **29, 30**  
– approved engine oils **29**  
– capacity **38**  
– dipstick **29**  
– indicator/warning lamp **11**  
Engine oil level **28**  
– indicator/warning lamp **11**  
Engine oil pressure **28**  
– indicator/warning lamp **11**  
Engine oil sensor  
– indicator/warning lamp **11**  
Engine oil temperature, refer to Engine oil thermometer **16**  
Engine oil thermometer **16**  
Engine output, refer to Engine data **36**  
Engine speed, refer to Engine data **36**  
ESP Electronic Stability Program, refer to Dynamic Stability Control DSC **18**

## F

Fasten safety belts  
– warning lamp **11**  
Filling sealant into wheel **32**  
Flat tire **18**  
– Flat Tire Monitor **18**  
– indicator/warning lamp **11**  
– M Mobility System **31**  
Flat tire, refer to Repairing a flat tire **31**  
Flat Tire Monitor **18**  
– indicator/warning lamp **11, 18**  
– snow chains **27**  
FTM, refer to Flat Tire Monitor **18**  
Fuel  
– display **16**  
– volume, refer to Capacities **38**

Fuel display, refer to Fuel gauge **16**  
Fuel reserve indicator, refer to Fuel gauge **16**  
Fuel tank capacity, refer to Capacities **38**

## G

Gross weight, refer to Weights **38**

## H

Hazard warning flashers **12**  
Headlamp flasher  
– indicator lamp **11**  
Headlamp washer reservoir  
– volume, refer to Capacities **38**  
Height, refer to Dimensions **37**  
High beams  
– indicator lamp **11**  
Horn **8**

## I

Indicator/warning lamp  
– brakes **11**  
– Flat Tire Monitor **18**  
Indicator and warning lamps, overview **11**  
Inflation pressure monitoring, refer to  
– Flat Tire Monitor **18**  
Inspection, refer to Service interval display **16**  
Instrument cluster **10**  
Instrument panel, refer to Cockpit **8**  
Interval  
– display, service **16**

## L

Length, refer to Dimensions **37**

Longlife oils **30**  
– alternative oils **30**  
– approved engine oils **29**  
Low-beam headlamps  
– indicator lamp **11**  
Low beams  
– indicator lamp, defective lamp **11**  
Luggage compartment  
– battery cover **31**  
– capacity **38**  
Luggage compartment lid  
– indicator lamp **11**

## M

M Mobility System **31**  
Maintenance  
– refer to Service interval display **16**  
Manufacturer **5**  
Measurements, refer to Dimensions **37**  
Mobility System **31**

## O

Oil, refer to Engine oil **28**  
Oil consumption **28**  
Oil filter change **38**  
Oil level **28**  
– checking **29**  
– indicator lamp **11**  
Oil pressure **28**  
– indicator/warning lamp **11**  
Oil sensor  
– indicator lamp **11**  
Oil service **16**  
Oil types **29**  
Onboard tool kit **31**

## P

Parking brake  
– indicator lamp **11**  
Parking lamps  
– indicator lamp **11**  
Parts and accessories, refer to Your individual vehicle **5**

Power output, refer to Engine data **36**  
 Power steering, hydraulic **18**  
 Pressure, tires  
 – restoring with M Mobility System **31**  
 Pressure monitoring, tires,  
 refer to Flat Tire Monitor **18**

## R

Rear lamps  
 – indicator lamp, defective lamp **11**  
 Refueling **26**

## S

Safety belts  
 – warning lamp **11**  
 Safety systems, refer to  
 – Dynamic Stability Control DSC **18**  
 Screwdriver, refer to Onboard tool kit **31**  
 Sealant bottle, refer to M Mobility System **31**  
 Service interval display **16**  
 Signal horn, refer to Horn **8**  
 Snow chains **27**  
 Special oils, refer to Approved engine oils **29**  
 Specified engine oils **29**  
 Speedometer **10**  
 Sport switch **13**  
 Stability control, refer to  
 – Driving stability control systems **18**  
 – Dynamic Stability Control DSC **18**  
 Starting assistance, refer to Dynamic Stability Control DSC **18**  
 Status at time of printing **5**  
 Steering wheel **8**  
 – buttons on steering wheel **9**  
 Switches, refer to Cockpit **8**  
 Symbols **4**

## T

Tachometer **16**  
 Tank capacity, refer to Fuel tank capacity **38**  
 Tank indicator, refer to Fuel gauge **16**  
 Technical data **36**  
 Temperature  
 – engine **16**  
 Tire pressure monitoring,  
 refer to Flat Tire Monitor **18**  
 Tire puncture  
 – M Mobility System **31**  
 Tires  
 – flat **18**  
 – Flat Tire Monitor **18**  
 – M Mobility System **31**  
 Tool kit, refer to Onboard tool kit **31**  
 Torque, refer to Engine data **36**  
 Track width, refer to Dimensions **37**  
 Traction control, refer to Dynamic Stability Control DSC **18**  
 Trunk volume, refer to Luggage compartment capacity **38**  
 Turning circle, refer to Dimensions **37**  
 Turn signal indicators  
 – indicator lamp **11**

## V

Vehicle  
 – break-in period **22**  
 – measurements, refer to Dimensions **37**  
 – weight **38**  
 Volume  
 – fuel tank, refer to Capacities **38**

## W

Warning and indicator lamps **11**  
 Washer fluid reservoir, refer to – Capacities **38**  
 Weights **38**  
 Wheelbase, refer to Dimensions **37**  
 Wheels and tires **27**  
 Width, refer to Dimensions **37**  
 Windshield washer reservoir  
 – volume, refer to Capacities **38**  
 Wrench, refer to Onboard tool kit **31**

## Refueling

So that you have important specifications available to you when you stop to refuel, we recommend that you fill out this table with the data that apply to your vehicle. The index of this Supplementary Owner's Manual, or the index of the BMW Z4 Owner's Manual, directs you to the respective information.

## Fuel

Designation

Please enter your preferred fuel here.

## Engine oil

Quality

The oil volume between the two marks on the oil dipstick corresponds to approx. 1.4 US quarts/1.3 liters.

## Tire inflation pressures

	Summer tires Front	Rear	Winter tires Front	Rear
Up to 2 persons				
2 persons plus luggage				

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

FarmaSOS.com

More about BMW



bmwusa.com

The Ultimate  
Driving Machine

# امداد خودرو فارما

تلفن شبانه روزی: ۰۲۱-۸۸۸۶۲۰۸۵

[FarmaSOS.com](http://FarmaSOS.com)

01 41 0 011 779 ue

